

- **Ideal for 433.92 MHz Transmitters**
- **Very Low Insertion Loss**
- **Quartz Stability**
- **Ultra Miniature Ceramic SMD Package (DCC6)**
- **Complies with Directive 2002/95/EC (RoHS Compliant)**

SR5513

ABSOLUTE MAXIMUM RATING ($T_A=25^{\circ}\text{C}$)			
Parameter		Rating	Unit
CW RF Power Dissipation	P	0	dBm
DC Voltage	V_{DC}	± 30	V
Operating Temperature Range	T_A	-10 ~ +60	$^{\circ}\text{C}$
Storage Temperature Range	T_{stg}	-40 ~ +85	$^{\circ}\text{C}$


ELECTRONIC CHARACTERISTICS						
	Parameter	Sym	Minimum	Typical	Maximum	Unit
Frequency (25 $^{\circ}\text{C}$)	Nominal Frequency	f_c	NS	433.92	NS	MHz
	Tolerance from 433.92 MHz	Δf_c	-	-	± 75	KHz
Insertion Loss		IL	-	1.6	2.0	dB
Quality Factor	Unloaded Q-Value	Q_U	-	10,200	-	-
	50 Ω Loaded Q-Value	Q_L	-	1,700	-	-
Temperature Stability	Turnover Temperature	T_o	25	-	55	$^{\circ}\text{C}$
	Turnover Frequency	f_o	-	f_c	-	KHz
	Frequency Temperature Coefficient	FTC	-	0.032	-	ppm/ $^{\circ}\text{C}^2$
Frequency Aging	Absolute Value during the First Year	$ f_A $	-	-	10	ppm/yr
DC Insulation Resistance Between any Two Pins		-	1.0	-	-	M Ω
RF Equivalent RLC Model	Motional Resistance	R_M	-	20	26	Ω
	Motional Inductance	L_M	-	74.8619	-	μH
	Motional Capacitance	C_M	-	1.7989	-	fF
	Shunt Static Capacitance	C_o	1.65	1.95	2.25	pF

NS = Not Specified

Note:

- The frequency f_c is the frequency of minimum IL with the resonator in the specified test fixture in a 50 Ω test system with VSWR $\leq 1.2:1$.
- Unless noted otherwise, case temperature TC = +25 $^{\circ}\text{C} \pm 2^{\circ}\text{C}$.
- Frequency aging is the change in fC with time and is specified at +65 $^{\circ}\text{C}$ or less. Aging may exceed the specification for prolonged temperatures above +65 $^{\circ}\text{C}$. Typically, aging is greatest the first year after manufacture, decreasing in subsequent years.
- Turnover temperature, T₀, is the temperature of maximum (or turnover) frequency, f₀. The nominal frequency at any case temperature, TC, may be calculated from: $f = f_o [1 - FTC (T_o - T_c)^2]$.
- This equivalent RLC model approximates resonator performance near the resonant frequency and is provided for reference only. The capacitance C₀ is the measured static (nonmotional) capacitance between input terminal and ground or output terminal and ground.
- The measurement includes case parasitic capacitance.
- Derived mathematically from one or more of the following directly measured parameters: f_c , IL, 3 dB bandwidth, f_c versus T_C, and Co.
- The specifications of this device are based on the test circuit shown above and subject to change or obsolescence without notice.
- Typically, equipment utilizing this device requires emissions testing and government approval, which is the responsibility of the equipment manufacturer.
- Our liability is only assumed for the Surface Acoustic Wave (SAW) component(s) per se, not for applications, processes and circuits implemented within components or assemblies.
- For questions on technology, prices and delivery, please contact our sales offices or e-mail to sales@vanlong.com.

PACKAGE DIMENSIONS (DCC6)

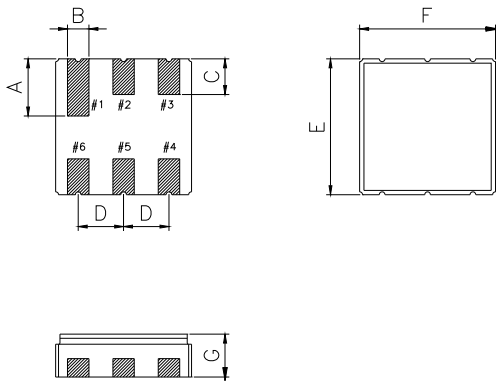

Electrical Connections

Terminals	Connection
2	Input / Output
5	Output / Input
1,3,4,6	Ground

Package Dimensions

Dimensions	Nom (mm)	Dimensions	Nom (mm)
A	1.90	E	3.80
B	0.64	F	3.80
C	1.00	G	1.20
D	1.27		



MARKING



Laser or Inkprint Marking:

- SR5513 - Part Code
- Date Code:
Y : Last digit of year
WW : Week No.

EQUIVALENT LC MODEL AND TEST CIRCUIT

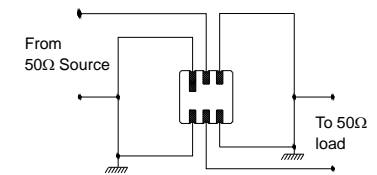


Equivalent LC Model


Test Circuit

TYPICAL APPLICATION CIRCUIT


Low Power Transmitter Application

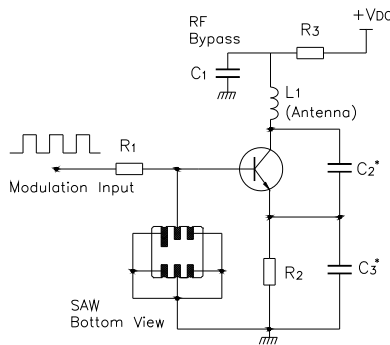


Local Oscillator Application

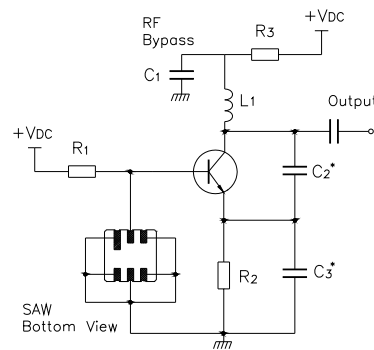

TYPICAL FREQUENCY RESPONSE

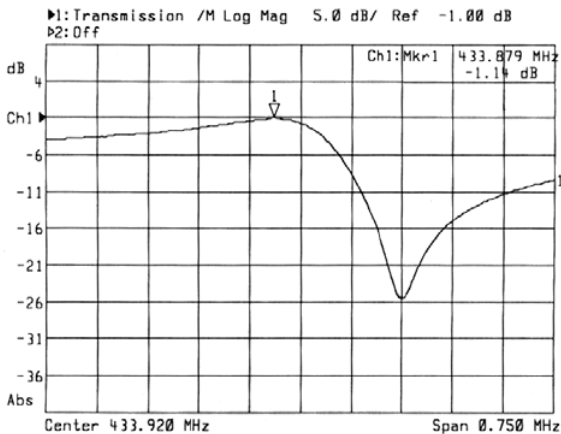

TEMPERATURE CHARACTERISTICS

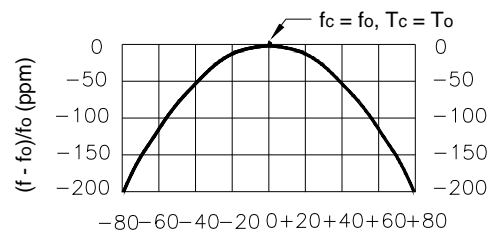

$\Delta T = T_c - T_o$ (°C)

The curve shown above accounts for resonator contribution only and does not include oscillator temperature characteristics.